




T-80 Appliance

Small-to-Medium and Distributed Deployments

Robust - Reliable - Secure

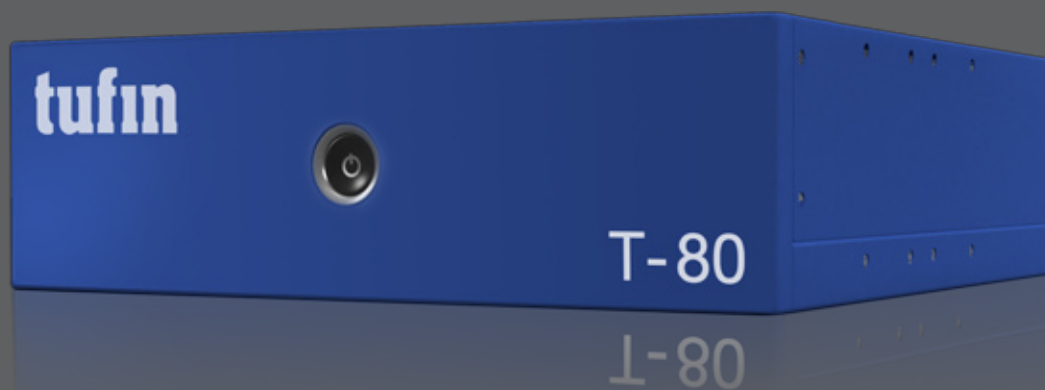

Tufin's T-80 appliance offers a convenient, robust and secure installation of the Tufin Security Suite. T-80 is ideal for both small-to-medium sized organizations, and for larger organizations with distributed deployments including smaller, remote sites.

- Appliance-based solution makes integration with existing network configuration simple
- Easy-to-use first-time installation wizard facilitates quick and easy setup
- Full support for Tufin Security Suite (TSS)
- Secure, tested and proven TufinOS™ ensures the highest security standards
- Single point of contact for all support calls and lower total cost of ownership
- Quick appliance replacement in case of hardware malfunction

Tufin T-80

Appliance Specifications

Capacity*	~10 Firewall Devices
Ethernet	1 x 10/100/1000 Gigabit Ethernet port (1000BaseTX)
I/O	Video, USB 2.0, Console port
AC Power Adapter	90W (20V, 4.5A) Power Adapter. 100 to 240 VAC
Recovery	Bootable USB Flash Drive

Physical Specification

	T-80	T-80 with Shipping Box
Dimensions	H: 1.9" (4.8 cm) W: 6.5" (16.5 cm) D: 6.5" (16.5 cm)	H: 3.94" (10 cm) W: 15.9" (40.6 cm) D: 10.24" (26 cm)
Weight	2.9 lbs (1.31 kg)	6 lbs (2.71 kg)

Environment

Operating Temperature	0 ~ 50°C (32 ~ 122°F)
Storage Temperature	-30 ~ 60°C (-22 ~ 140°F)
Relative Humidity	90% RH (45°C non-condensing)
Operating Vibration	0.5 Grms, Random, 10~500Hz, X,Y,Z 3Axes, 0.5hr/Axis
Non-Operating Vibration	2 Grms, random, 10~300Hz, X,Y,Z 3Axes, 1hr/Axis
Operating Shock	8G, Half sine, 11ms duration, X,Y,Z 3Axes, 6Direction, 3 shocks/direction
Non-Operating Shock	50G, Half sine, 11ms duration

Global Certifications

Certifications	CE, FCC, UL, CB
----------------	-----------------

* Number of devices may vary based on configuration