

Arbor APS

Always On, In-Line, Intelligently Automated DDoS Protection

KEY FEATURES & BENEFITS

Always On, In-Line, DDoS Protection

Out of the box, on-premise protection against volumetric, state-exhaustion and application-layer DDoS attacks.

Inbound and Outbound Protection

Stop in-bound DDoS attacks and out-bound malicious activity from compromised internal hosts.

Intelligently Automated Cloud Signaling

When needed, signal upstream to Arbor Cloud (or your ISP) to stop large attacks that will overwhelm your on-premises protection.

Embedded SSL Inspection

Stop DDoS attacks hidden in encrypted traffic.

Managed APS (mAPS) Service

Rely upon the industry leading expertise of Arbor Networks to manage your on-premise Arbor APS products and optimize your DDoS protection.

Support for Virtual & Hybrid-Cloud Environments

vAPS is a virtual version of the APS appliance that can be run in your private virtual environment or in Amazon Web Services (AWS), providing unified protection for your hybrid-cloud environment.

ATLAS Intelligence Feed

Protection that is continuously updated with the latest global threat intelligence from Arbor's Security Engineering & Response Team (ASERT).

Support for IPv6

Detect and stop both IPv4 and IPv6 attacks.

As your dependency for internet access and online applications and services increases, so too does the risk of Distributed Denial of Service (DDoS) attacks. In NETSCOUT® Arbor's latest *Worldwide Infrastructure Security Report (WISR)*, respondents reported an increase in the size, frequency and complexity of DDoS attacks from previous years.

The Arbor portfolio of DDoS attack protection solutions tackles these advanced threats head-on by providing you a complete view of network activities for fast remediation and expert-level blocking. Arbor® APS helps protect business continuity and availability from the growing constellation of DDoS attacks and other advanced threats. It provides the world's most advanced and sophisticated attack detection and mitigation technology in an easy-to-deploy platform designed to automatically neutralize IPv4 and IPv6 attacks before they impact critical applications and services.

With the ATLAS® Intelligence Feed, real-time updates containing actionable intelligence on DDoS and advanced threats can help prevent an attack from impacting your networks or services. Such capabilities are:

- DDoS protection from active botnets
- DDoS protection from active DDoS campaigns based on IP reputation
- Advanced web crawler service
- GeolIP tracking
- Domain and IP reputation to block threats

Arbor APS enhances your overall protection by using Cloud Signaling™ to intelligently and automatically connect local protection with cloud-based DDoS services. With Cloud Signaling, APS automatically alerts upstream service providers, such as your ISP or Arbor CloudSM, when larger attacks threaten availability. This allows for a faster time to mitigate attacks.

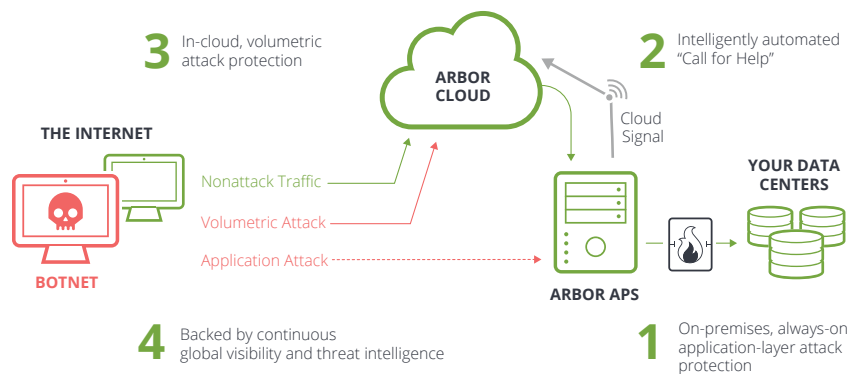


Figure 1: The fully integrated combination of 1) APS on premises for always on, in-line protection against application-layer attacks; 2) Intelligent Cloud Signaling to 3) Arbor Cloud to stop the larger attacks — 4) all continuously armed with the global threat intelligence of ATLAS/ASERT — offers the most comprehensive DDoS protection solution in the industry.



Arbor APS Platforms

Features	2600	2800
Physical Dimensions	Chassis: 2U rack height; Height: 3.45 inches (8.67 cm); Width: 17.4 inches (43.53 cm); Depth: 20 inches (50.8 cm); Weight: 36.95 lbs. (17.76 kg)	
Power Options	DC: 2 x DC redundant, hot swap capable power supplies; DC Power Ratings: -40 to -72 Vdc, 28/14 A max (per DC input); AC: 2 x AC redundant, hot swap capable power supplies; AC Power Ratings: 100 to 240 VAC, 50 to 60 Hz, 12/6 A max; Watts: 315 typical, 375 max	
Hard Drives	2 x 120 GB SSD in RAID 1 Configuration	2 x 240 GB SSD in RAID 1 Configuration
Environmental	Operating: Temperature : 41°F to 104°F (5° to 40°C) Humidity: 5–85%; Non-Operating: Temperature -40° to 158°F (-40° to 70°C); Humidity 95%	
Memory	32 GB	64 GB
Processor	2 x Intel Xeon E5-2608L v3 (6 cores) 2 GHz; Watts: 315 typical, 375 max	Dual Intel Xeon (12-core) E5–2648L v3 –1.80GHz
Operating System	Our proprietary, embedded ArbOS® operating system	
Management Interfaces	2 x 10/100/1000 BaseT Copper; RJ-45 serial console port	2 x 10/100/1000 BaseT Copper; RJ-45 serial console port
Protection Interface	<ul style="list-style-type: none"> • 4, 8 or 12 1G bypass ports (copper, sx fiber, lx fiber) • 4 x 10 G bypass ports plus 0, 4 or 8, 1 G bypass ports 	<ul style="list-style-type: none"> • 4 x 10 GigE (SR or LR mixed fiber) • 8 x 10 GigE (SR or LR or mixed fiber) • 8 x 10 GigE (SR or LR or mixed fiber) + 4 x 1 GigE (SX or LX fiber, or copper)
Traffic Bypass Options	Integrated hardware bypass; Internal “software” bypass to pass traffic without inspection	
Latency	Less than 80 microseconds	
Availability	Inline bypass, dual power supplies, solid-state hard drive RAID cluster	
MTBF	44,000 hours	
Regulatory Compliance	UL60950-1/CSA 60950-1 (USA/Canada); EN60950-1 (Europe); IEC60950-1 (International), CB Certificate & Report including all international deviations; GS Certificate (Germany); EAC-R Approval (Russia); CE—Low Voltage Directive 73/23/EEE (Europe); BSMI CNS 13436 (Taiwan); KCC (South Korea); RoHS Directive 2002/95/EC (Europe)	
Inspected Throughput	Licenses for 100 Mbs, 500 Mbs, 1 Gbps, 2 Gbps, 5 Gbps, 10 Gbps, 15 Gbps, 20 Gbps	Licenses for 10 Gbps, 20 Gbps, 30 Gbps, 40 Gbps; software upgradeable
Maximum DDoS Flood Prevention Rate	Up to 15 Mpps	Up to 28.80 Mpps
Simultaneous Connections	Not applicable: APS does not track connections	
HTTP(s) Connections/SEC	368K at recommended protection level; 613K filter list only protection	1,351K at recommended protection level; 1,497K filter list only protection
SSL Decryption Options	Inspected Throughput: Options for 750 Mbps and 5 Gbps HTTPS Connections: Up to 7,500 (750M HSM) or 45,000 (5G HSM) Concurrent Sessions: Up to 150,000	Inspected Throughput: Up to 5 Gbps HTTPS Connections: Up to 45,000 Concurrent Sessions: Up to 150,000
	Supported encryption protocols: SSL 3.0, TLS 1.0, 1.1 and 1.2; Supported Cypher Suites: RSA, ECDH, ECDHE; FIPS 140-2 Level 2 and 3 support; Separate “Trusted-Path” Administration for FIPS 140-2 Level 3; Secure tamper-proof enclosure; Keys cleared if enclosure breached	
Maximum Number of Keys/Certificate Pairs	1998	
Protected Endpoints	Unlimited	
Authentication	On device, RADIUS; TACACS	
Management	SNMP gets v1, v2c; SNMP traps v1, v2c, v3; CLI; Web UI; HTTPS; SSH customizable, role-based management; Up to 50 APS (appliances and/or virtual APS running KVM hypervisor)can be managed by the APS Console; managed APS must at least be running v5.11; vAPS Console can run on VM hypervisor.	

Features	2600	2800
Protection Groups	100	
Reporting and Forensics	Real-time and historical IPV4 and IPV6 traffic reporting, extensive drill-down by protection group and blocked host including total traffic, passed/blocked,top destination URLs/services/domains, attack types, blocked sources, top sources by IP location. Packet visibility in real-time.	
DDoS Protection	TCP/UDP/HTTP(S) flood attacks, botnet protection, hacktivist protection, host behavioral protection, anti-spoofing, configurable flow expression filtering, payload expression-based filtering, permanent and dynamic blacklists/whitelists, traffic shaping, multiple protections for HTTP, DNS and SIP, TCP connection limiting, fragmentation attacks, connection attacks.	
Modes	Inline active; inline inactive (reporting, no blocking); SPAN port monitor	
Notifications	SNMP trap, syslog, email	
Cloud Signaling	Yes (collaborative DDoS attack mitigation with service provider or Arbor Cloud)	
Web-Based GUI	Supports multi-language translated user interfaces	
Supported Browsers	Internet Explorer v10-11, Firefox ESR v31, Firefox v40, Chrome v44, Safari v6	

Arbor APS Console

Supported Platforms	Arbor Appliance; Virtual Machine
Max Number APS Managed	50
Virtual APS Console Requirements	VMware vSphere 5.5+; 2 CPUs; 100 GB hard disk space; 4 GB RAM; 1 management interface (a second management interface is optional)
Management Options	Configuration or Views into (individual and/or all APS); Hardware and Software health; System and Security alerts; Blocked Hosts; ATLAS Threat Summary; Server Types, Protection groups (IPV4/6); Blacklist/Whitelist; Executive Management Reports
Supported Browsers	Internet Explorer v10-11, Firefox ESR v31, Firefox v40, Chrome v44, Safari v6

Arbor APS Console 7000 Appliance

Memory	128G (8x16G DIMMs)
Processor	Intel Xeon (12-Core) – ES-2648Lv3 – 1.8GHz – 20M Cache – 9.60 GT/sec – 75W
Power Requirements	Redundant, load sharing and auto-sensing 850W dual power supplies; AC: 100-240 VAC, 50/60 Hz, 12/6 A; DC: -40 to -72 V, 28/14 A max
Physical Dimensions	Chassis: 2U rack height; Height: 3.45 inches (8.67 cm); Width: 17.4 inches (43.53 cm) Depth: 20 inches (50.8 cm); Weight: 36.95 lbs. (17.76 kg); Standard 19 and 23 inches rack mountable
Hard Drives	Six 480 GB solid state drives configured for RAID 5
Network Interfaces	2 x 1 GigE (SFP for Copper, GigE SX, or GigE LX)
Environmental	Operating: Temperature 41° to 104°F (5° to 40°C); Humidity 95%; Non-Operating: Temperature 73° to 104°F (23° to 40°C)
Operating System	Our proprietary, embedded ArbOS® operating system, based on Linux
Regulatory Compliance	UL60950-1/CSA 60950-1; EN60950-1; IEC60950-1, CB Certificate & Report including all international deviations; SONCAP; EAC Mark; CE—Low Voltage Directive 2014/35/EU; KCC Mark; RoHS 2011/65/EU; Telcordia GR-63; ETSI EN 300 019; NEBS; ETSI EN 300 753; cULus Mark; IC ICES-003 Class A; CE Mark to EMC Directive, 2014/30/EU; EN55022, Class A; EN55024; EN61000-3-2; EN61000-3-3, CISPR22, Class A, CISPR 24 Immunity; FCC 47 CFR Parts 15, Class A

Virtual APS

Virtual Network Function (VNF) Orchestration	Cloud-Init v0.7.6, Openstack Kilo and Mitaka series	
Support for Amazon AWS	Yes, Amazon EC2	
Minimum Virtual Machine Requirements	vCPUs: 1; NICs: 1 to 10; Memory: 6 GB; Storage: 100 GB	
Supported Hypervisors	VMware vSphere 5.5+	KVM kernel 3.19 QEMU 2.0
Inspection Throughput/Instance	1 Gbps	1 Gbps
Maximum DDoS Flood Rate/Instance	910 Gbps	600 Gbps
Protection Groups	10; 50 with 4 vCPUs and 12 GB RAM	10; 50 with 4 vCPUs and 12 GB RAM



Corporate Headquarters
 NETSCOUT Systems, Inc.
 Westford, MA 01886-4105
 Phone: +1 978-614-4000
www.netscout.com

Sales Information
 Toll Free US: 800-309-4804
 (International numbers below)

Product Support
 Toll Free US: 888-357-7667
 (International numbers below)

NETSCOUT offers sales, support, and services in over 32 countries. Global addresses, and international numbers are listed on the NETSCOUT website at: www.netscout.com/company/contact-us